



## RT5kVA and RT6kVA 3U Rack or Tower Uninterruptible Power Supplies

### Product Guide

The RT5kVA and RT6kVA 3U Rack or Tower Uninterruptible Power Supply (UPS) offerings provide extended power protection with increased efficiency and simplified power management to safeguard high-availability of System x® and ThinkServer® server environments. With efficiency ratings of up to 98%, these compact 3U rack or tower designs can help reduce energy usage without compromising performance or reliability. The 3U Rack or Tower UPS units can be installed in a data center rack cabinet or can be used as tower UPS units in office and distributed IT environments where extended power protection is required.

The 3U Rack UPS unit (RT5kVA or RT6kVA) with the Extended Battery Module is shown in Figure 1.



Figure 1. RT5kVA or RT6kVA 3U Rack UPS unit (top) with Extended Battery Module (bottom)

### Did you know?

3U Rack or Tower UPS units feature Advanced Battery Management (ABM) technology that uses a unique three-stage charging technique that significantly extends battery service life and optimizes recharge time, compared to traditional charging methods.

3U Rack or Tower UPS units can enhance system availability with individual receptacle groups or load segments that can be programmed and controlled, which allows mission-critical devices to be prioritized during shutdown to preserve battery run time if there is a prolonged power outage.

3U Rack or Tower UPS units come standard with UPS Manager software that integrates seamlessly with the major virtualization platforms, which enables you to view and manage your entire power system from your current dashboard. It also triggers live migration during power outages and avoids data loss by gracefully shutting down virtual machines and hosts in a cluster if there is an extended power outage.

## Ordering information

Table 1 shows the part numbers and feature codes for the 3U Rack or Tower UPS models and options.

Table 1. Ordering part numbers and feature codes

Description	Part number	Feature code
<b>UPS units</b>		
RT5kVA 3U Rack or Tower UPS (200-240VAC)	55945KX	A540 (5594-RU6)
RT6kVA 3U Rack or Tower UPS (200-240VAC)	55946KX	A541 (5594-RU6)
<b>Extended Battery Modules</b>		
5kVA/6kVA 3U Rack or Tower Extended Battery Module	55946BX	A542
<b>Options</b>		
Environmental Monitoring Probe	46M4113	6146

The UPS models are shipped standard with the Network Management Card (NMC) installed, and they include the following items:

- An accessory kit that contains the following items:
  - Rack-mount kit
  - Rack installation instructions
  - Tower kit
  - Serial cable: 3.7 m (12 ft)
  - USB cable
  - Remote On/Off (ROO) and Remote Power Off (RPO) connector
- A documentation kit that contains the following items:
  - Warranty flyer
  - Important Notices Manual
  - Documentation CD
  - Software CD, which contains UPS Manager power management software

The Extended Battery Modules (EBMs) are shipped with the following items:

- An accessory kit that contains the following items:
  - Rack-mount kit
  - Tower kit
  - EBM power cable
  - EBM detection cable
- A documentation kit that contains the following items:
  - Warranty flyer
  - Important Notices Manual
  - Documentation CD

The RT5kVA and RT6kVA 3U Rack or Tower UPS models do not ship with line cords. Table 2 lists the compatible line cords that are suitable for the RT5kVA 3U Rack or Tower UPS unit. The RT6kVA 3U Rack or Tower UPS unit has a hardwired terminal block connector for AC input power.

Table 2. Line cords for the RT5kVA 3U Rack or Tower UPS unit

Description	Part number	Feature code
DPI 30A Cord (NEMA L6-30P)	40K9614	6500
DPI 32A Cord (IEC 309 P+N+G)	40K9612	6502
DPI PDU+ Australian/NZ 3112 Cord (32A)	40K9617	6505
DPI PDU+ Korean 8305 Line Cord (30A)	40K9618	6506

All 3U Rack or Tower UPS models come standard with an NMC installed. The NMC provides convenient, over-the-network UPS remote monitoring and management through a standard web browser or UPS Power Manager software. Figure 2 shows the UPS NMC.



Figure 2. UPS Network Management Card

The NMC has the following features:

- Versatile connectivity through HTTP, SNMP, SMTP, Telnet, SSL, and SSH
- Simultaneous shutdown of protected servers
- Configuration of automatic email messages in response to UPS alarms and to transmit periodic reports
- Customizable actions, including automatic shutdown if there is an extended power failure with standard UPS Power Protector software
- Control of UPS on/off switching with a web browser
- Adjustment and control of load segments through the HTML interface, including sequential starting of the installation and optimization of backup time by shutting down non-priority systems
- Automatic date and time adjustment through an NTP server
- Dual stack IP v4/IP v6
- Recording of events and measurements in the card log
- Data and event logging in the nonvolatile memory
- Card firmware update through the network
- 10/100 Mb Ethernet (RJ-45 connector) with auto-negotiation
- Measurement of humidity and temperature with the optional Environmental Monitoring Probe (EMP)

An optional Environmental Monitoring Probe (EMP) (part number 46M4113) is used to report local temperature and humidity values and make that information available to management tools. The EMP connects to the UPS via the NMC. The EMP is shown in Figure 3.



Figure 3. Environmental Monitoring Probe

The EMP has the following features:

- Monitors temperature, humidity, and status of two user-provided contact devices or sensors
- Connects to an NMC through an RJ-45 CAT5 Ethernet cable (1 m cable included with the EMP)
- Can be located up to 20 m (65.6 ft) from the UPS
- Measures ambient temperatures between 0 - 80 °C (32 - 176 °F) with an accuracy of  $\pm 1$  °C
- Measures relative humidity between 10 - 90% with an accuracy of  $\pm 5\%$
- Temperature, humidity, and contact closure status can be displayed through a web browser
- Supports user-defined alarm thresholds for temperature, humidity, and contact closure status
- Events are stored in the NMC's event log
- Sends SNMP alarms to network management systems
- Sends e-mail notifications through SMTP

## Features

A UPS is a device that acts as a defensive barrier between electronic equipment and incoming power problems. It conditions, regulates, and filters out power disturbances to ensure a clean power source for IT equipment. A UPS also provides battery backup if there is a power failure.

In today's high availability server environments, unplanned power outages or line quality irregularities can have a considerable financial impact on all sized businesses. The typical utility power is 99.9% available, but that means that there can be almost 9 hours of downtime a year, not to mention brownouts and other power quality problems. Selecting the right UPS can help protect against these potentially costly issues.

The RT5kVA and RT6kVA 3U Rack or Tower UPS units protect against power failures, power sags, power surges, under-voltage, electrical line noise, over-voltage, frequency variation, switching transients, and harmonic distortion.

The RT5kVA and RT6kVA 3U Rack or Tower UPS models offer the following features:

- High-efficiency protection delivers more real power (Watts) in a compact tower or 3U rack design, lowering power and cooling consumption
- A graphical Liquid Crystal Display (LCD) that provides intuitive configuration, management and monitoring capabilities in the following languages to reduce management complexity:
  - English
  - French
  - German
  - Spanish
  - Russian
  - Portuguese
  - Italian
- Hot-swappable batteries for maximum uptime, availability, and ease of maintenance
- Standard UPS Power Manager software that provides effective local or remote power monitoring and management for servers and virtual machines, and allows for graceful remote system shutdown
- ABM technology that significantly extends battery service life and optimizes recharge time
- Load segments for individual control of receptacle groups to manage sequential shut downs and start ups and reserve battery run time for the most critical equipment
- Optional EBMs that provide extra run time to critical systems during a prolonged power outage
- Standard Network Management Card (NMC) for enhanced UPS monitoring and control over-the-network through a standard web browser
- An optional EMP for thermal management requirements (temperature and humidity)
- Dual channel communication through the USB or RS-232 port at the same time to maximize communications flexibility

- Remote flash upgradeable firmware for both the UPS and NMC, which makes it an ideal solution for remote locations
- An ROO and RPO port to control power of the UPS unit through a wired remote switch

## Technical specifications

Table 3 lists the technical specifications for the 5kVA and 6kVA 3U Rack or Tower UPS models.

Table 3. Technical specifications

Specification	RT5kVA 3U Rack or Tower UPS (200-240VAC)	RT6kVA 3U Rack or Tower UPS (200-240VAC)
<b>General</b>		
Part number	55945KX	55946KX
Form factor	3U Rack or Tower	3U Rack or Tower
Topology	Online, double conversion, sinewave output	
VA/Watts rating	5000 VA/4500 W	6000 VA/5400 W
Efficiency (on utility power)	<ul style="list-style-type: none"> <li>• Online mode: Up to 94%</li> <li>• High efficiency mode: Up to 98%</li> </ul>	<ul style="list-style-type: none"> <li>• Online mode: Up to 94%</li> <li>• High efficiency mode: Up to 98%</li> </ul>
Transfer time	<ul style="list-style-type: none"> <li>• Online mode: 0 ms (no break)</li> <li>• High efficiency mode: 10 ms maximum (due to loss of utility power)</li> </ul>	
Energy Star compliant	Yes	Yes
<b>Electrical input</b>		
Input voltage	200 - 240 V AC	200 - 240 V AC
Input frequency	50/60 Hz	50/60 Hz
Max input amperage	25 A	30 A
Input connector	Proprietary	Hardwired terminal block
Input line cord	Optional (See Table 2)	Onsite wiring required
<b>Electrical output</b>		
Output voltage settings	200/208/220/230/240 V AC	200/208/220/230/240 V AC
Output frequency	50/60 Hz	50/60 Hz
Output power capacity	200-240 V AC: 5000 VA/4500 W	200-240 V AC: 6000 VA/5400 W
Output connectors	<ul style="list-style-type: none"> <li>• 2x IEC 320-C19 (16 A)</li> <li>• 8x IEC 320-C13 (10 A)</li> </ul>	<ul style="list-style-type: none"> <li>• 2x IEC 320-C19 (16 A)</li> <li>• 8x IEC 320-C13 (10 A)</li> </ul>
Output load segments	<ul style="list-style-type: none"> <li>• Master: 2x C19</li> <li>• Group 1: 4x C13</li> <li>• Group 2: 4x C13</li> </ul>	<ul style="list-style-type: none"> <li>• Master: 2x C19</li> <li>• Group 1: 4x C13</li> <li>• Group 2: 4x C13</li> </ul>
<b>Batteries</b>		
Battery type	Valve Regulated Lead Acid (VRLA): Maintenance-free, sealed, leak-proof	
Battery management	ABM technology or temperature-compensated charging method (user selectable), automatic battery test and deep discharge protection, automatic recognition of external battery units.	
Battery replacement	Hot-swap internal battery and extended battery modules	

Specification	RT5kVA 3U Rack or Tower UPS (200-240VAC)	RT6kVA 3U Rack or Tower UPS (200-240VAC)
External battery support	Up to 4 (PN 55946BX)	Up to 4 (PN 55946BX)
Typical backup times	See Table 4	
<b>Communications and management</b>		
USB port (Type B)	Yes	Yes
RS-232 serial port (RJ-45)	Yes	Yes
10/100 Mbps Ethernet port (RJ-45)	Yes (on the NMC)	
Environmental monitoring	Optional with EMP, 46M4113 (requires NMC, 46M4110)	
Management software	UPS Power Manager (UPM) and UPS Power Protector (UPP)	
Control panel	Intelligent 5-button graphical LCD	
LED indicators	Online, On Battery, Bypass, and Fault	
Remote On/Off and Power Off	Remote On/Off (ROO) and Remote Power Off (RPO) terminal block connectors	

Table 4 lists the expected period that the 3U Rack or Tower UPS models operate only on batteries, depending on the load.

**Note:** Battery backup times are approximate and can vary with equipment, configuration, battery age, and temperature.

Table 4. 3U Rack or Tower UPS runtime chart

Load		Run time, Minutes				
Percentage	Watts	No EBM	1x EBM	2x EBMs	3x EBMs	4x EBMs
<b>RT5kVA 3U Rack or Tower UPS (200-240VAC)</b>						
25%	1125 W	27	103	175	262	377
50%	2250 W	11	48	88	123	167
75%	3375 W	5.3	27	53	83	109
100%	4500 W	3.4	20	38	54	80
<b>RT6kVA 3U Rack or Tower UPS (200-240VAC)</b>						
25%	1350 W	22	85	147	214	287
50%	2700 W	8.5	38	71	104	133
75%	4050 W	4.5	24	45	62	90
100%	5400 W	3	16	27	47	58

## Connectors and controls

The front of the RT5kVA and RT6kVA 3U Rack or Tower UPS units feature a 5-button graphical LCD. The display provides useful information about the UPS, load status, events, measurements, and settings.

Figure 4 shows the control panel on the front of the 3U Rack or Tower UPS.

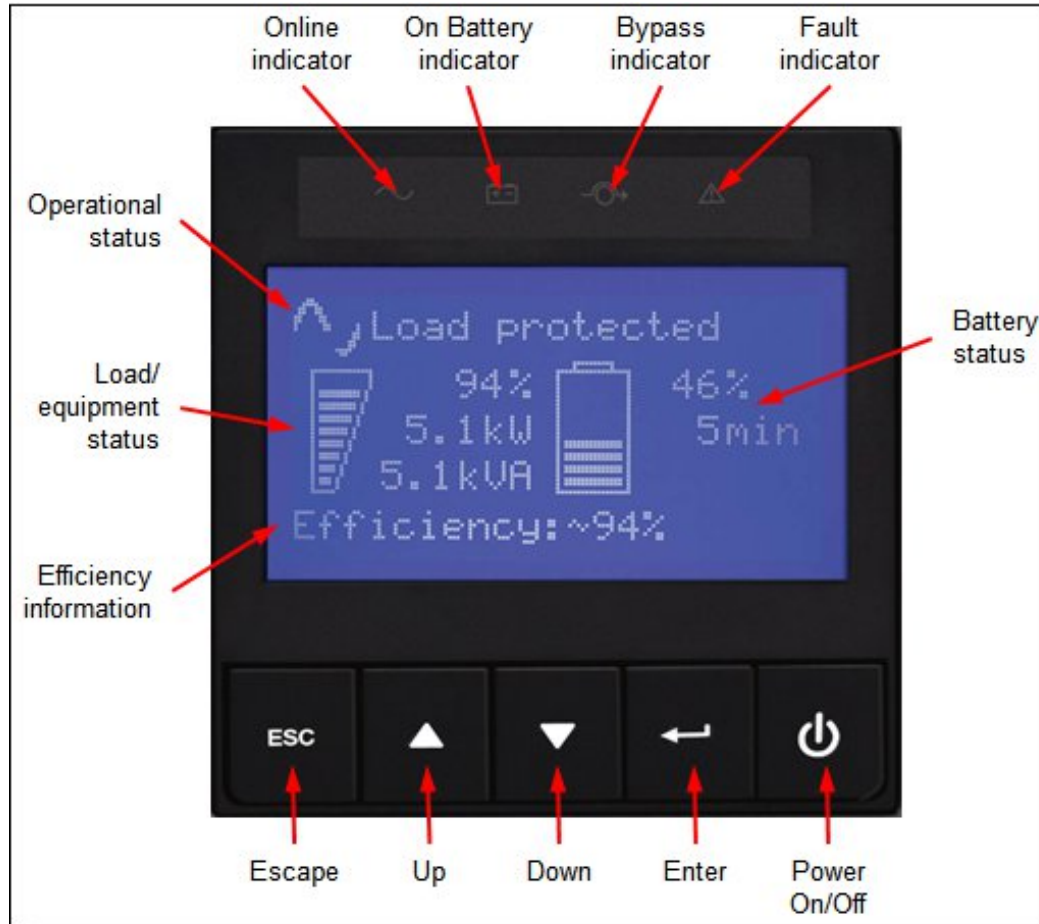


Figure 4. Control panel on the front of the RT5kVA or RT6kVA 3U Rack or Tower UPS

The following functions are available on the control panel:

- Status information: Displays the battery status, load percentage, output power, operational mode, and load group information.
- Measurements: Displays the output Watts, VA, amperage, power factor, voltage, frequency, input voltage, input frequency, battery voltage, efficiency, and power usage.
- Control: Displays the battery test, reset error state, configure load segments, clear power usage measurements, and restore settings.
- Settings: Allows you to change product general parameters and set input and output parameters, on/off conditions, and battery configuration.
- Event log: Displays the stored events, selects faults, alarms and events to display, and clears events.
- Fault log: Displays the event log and alarm history.
- Identification: Displays the machine type, model, and serial number of the unit, and the firmware level of the UPS, including the NMC's firmware level and IP address.

Figure 5 shows the rear view of the RT5kVA 3U Rack or Tower UPS (200-240VAC) (55945KX).

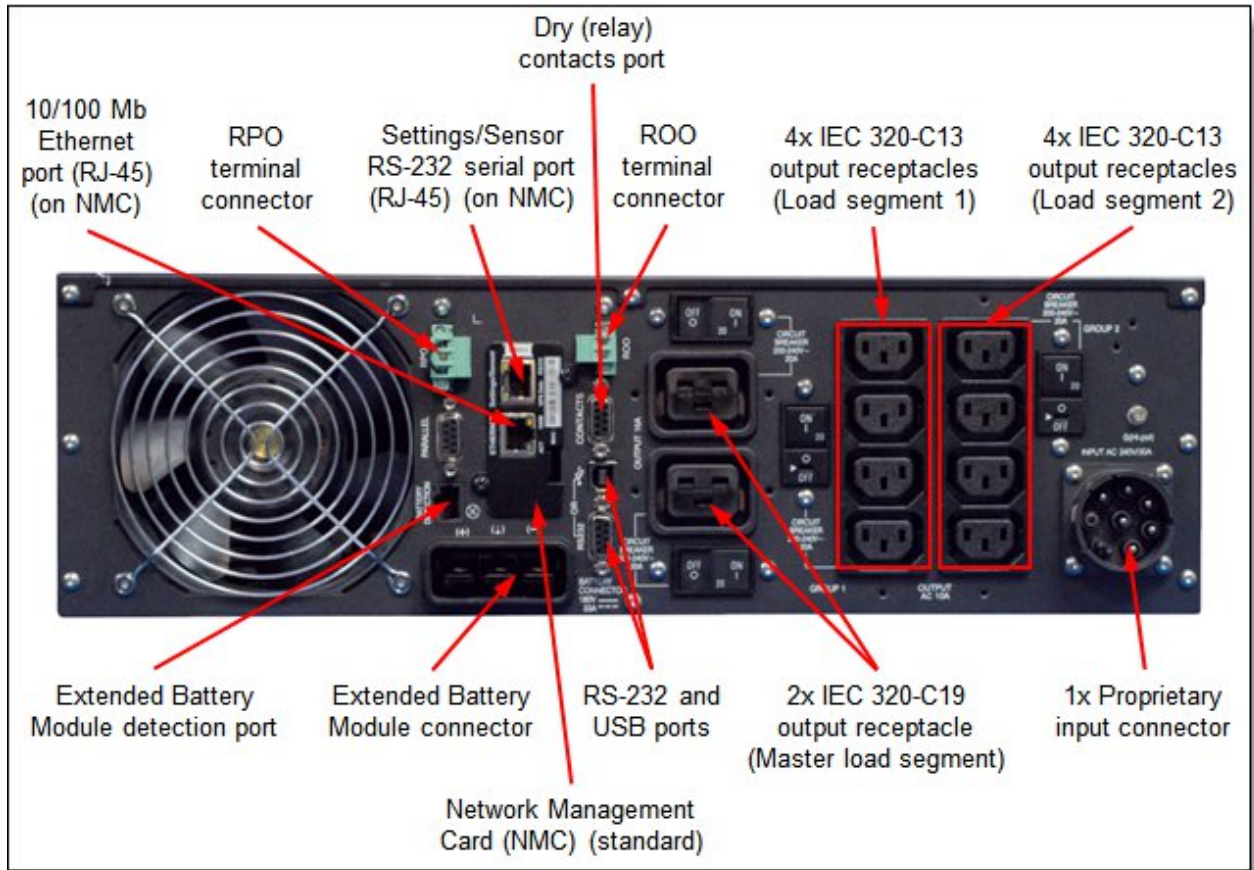


Figure 5. Rear view of the RT5kVA 3U Rack or Tower UPS (200-240VAC) (55945KX)

Figure 6 shows the rear view of the RT6kVA 3U Rack or Tower UPS (200-240VAC) (55946KX).



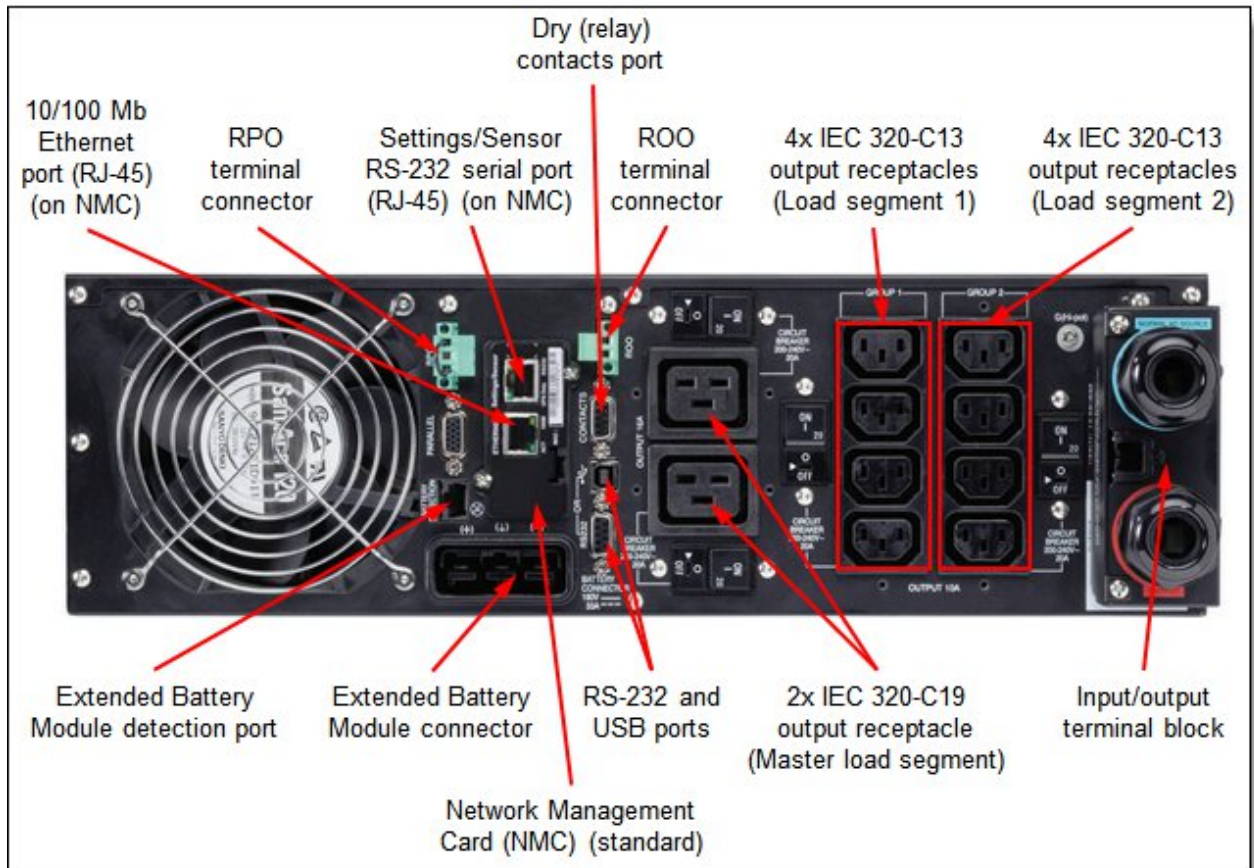


Figure 6. Rear view of the RT6kVA 3U Rack or Tower UPS (200-240VAC) (55946KX)

Figure 7 shows the rear view of the 5kVA/6kVA 3U Rack or Tower Extended Battery Module (55946BX).

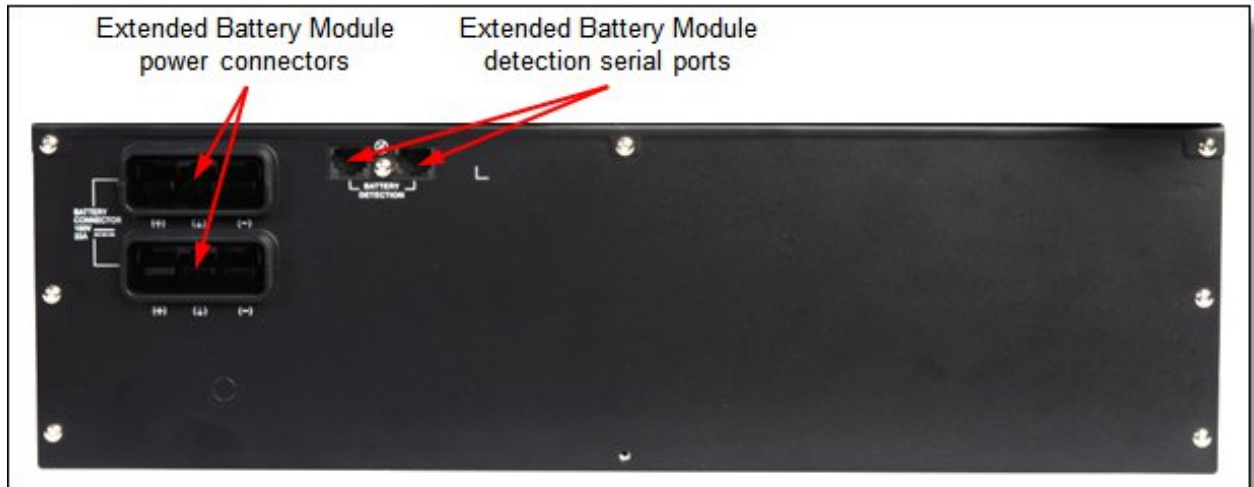


Figure 7. Rear view of the 5kVA/6kVA 3U Rack or Tower Extended Battery Module (55946BX)

## Physical specifications

The 5kVA and 6kVA 3U Rack or Tower UPS units have the following physical specifications (approximate):

- Height: 130 mm (5.1 in.)
- Width: 441 mm (17.4 in.)
- Depth: 685 mm (27.0 in.)
- Weight: 48 kg (106 lb)

The 5kVA/6kVA 3U Rack or Tower Extended Battery Module has the following physical specifications (approximate):

- Height: 130 mm (5.1 in.)
- Width: 441 mm (17.4 in.)
- Depth: 645 mm (25.4 in.)
- Weight: 68 kg (150 lb)

## Operating environment

The RT5kVA and RT6kVA 3U Rack or Tower UPS units are supported in the following environment:

- Temperature (operation): 0 - 40 °C (32 - 104 °F), with linear derating for altitude
- Relative humidity: 0 - 95%
- Maximum altitude (operation): 3,000 m (9,843 ft)

**Note:** These UPS units are not supported in a maritime environment.

## Agency approvals

The RT5kVA and RT6kVA 3U Rack or Tower UPS units conform to the following regulations:

- FCC
- UL
- CSA or cUL
- CE Mark
- NOM
- GOST
- BSMI Taiwan
- CB Report
- VCCI
- C-Tick (Australia)
- IRAM (Argentina)

## Warranty

The RT5kVA and RT6kVA 3U Rack or Tower UPS models have a 3-year limited warranty. Optional features have a 1-year warranty.

## Management software

The RT5kVA and RT6kVA 3U Rack or Tower UPS units come standard with UPS Power Manager (UPM) and UPS Power Protector (UPP) software.

UPM brings managing various power and environmental devices under control through a single, web-based interface. The UPM software solution ensures system uptime and data integrity by allowing you to monitor, manage, and control the devices on your network remotely.

The UPM user interface is shown in Figure 8.

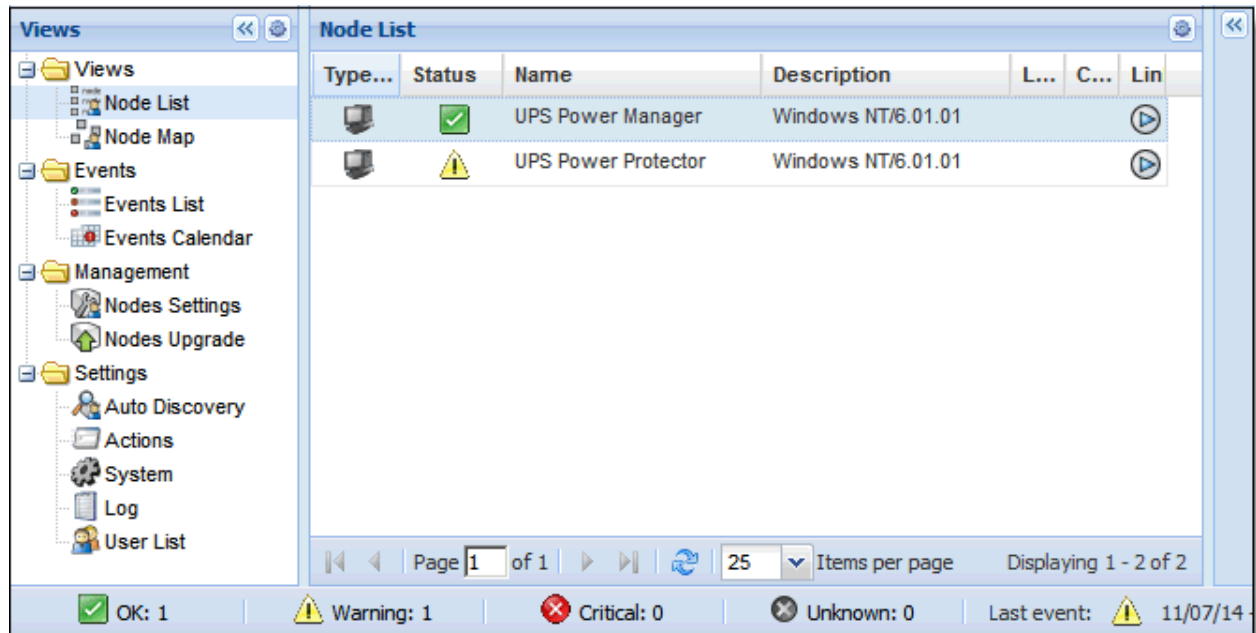


Figure 8. UPM User Interface

The UPM software offers the following features:

- Monitors and manages multiple power and environmental devices from a web browser or your virtual machine management dashboard
- Seamlessly integrates into popular virtualization infrastructures, including VMware ESXi, Microsoft Hyper-V, Citrix XenServer, and Linux KVM
- Triggers live migration for virtual machines during power outages
- By using user-definable tree structure, enables grouping, access, and management of multiple devices across multiple locations
- Monitors power consumption, which helps track ways to improve energy efficiency
- Uses auto discovery to provide fast installation by automatically detecting devices on the network
- Mass-upgrades firmware, which reduces network management card setup and maintenance time

UPP software facilitates automatic, graceful shutdown of computers, servers, and network devices that are powered by a UPS, which saves all work-in-progress and ensures data integrity. UPP's user interface provides detailed information about connected servers and UPS units through USB and serial or network communication.

The UPP user interface is shown in Figure 9.



Figure 9. UPP User Interface

The UPP software offers the following features:

- Helps avoid data loss by gracefully shutting down computers and virtual machines and servers powered by a UPS during an extended power outage
- Keeps servers running smoothly by automatically identifying hang-ups and rebooting the machine by using a watchdog capability
- Provides redundancy capability for dual-cord servers
- Features an easy-to-use web browser interface
- Communicates with the protected device directly (via USB or serial) or through the network (via an NMC)

## Supported servers

The RT5kVA and RT6kVA 3U Rack or Tower UPS offerings are compatible with all System x and ThinkServer servers and other devices that require AC power. These UPS units are intended for use with the following System x and ThinkServer servers:

- System x
  - x3100 M4
  - x3100 M5
  - x3250 M4
  - x3250 M5
  - x3300 M4
  - x3500 M4
  - x3500 M5
  - x3530 M4
  - x3550 M4
  - x3550 M5
  - x3630 M4
  - x3650 M4
  - x3650 M4 BD
  - x3650 M4 HD
  - x3650 M5
  - x3690 X5
  - x3750 M4
  - x3850 X5/x3950 X5
  - x3850 X6/x3950 X6
- ThinkServer
  - RS140
  - RD340
  - RD440
  - RD540
  - RD550
  - RD640
  - RD650
  - TS140
  - TS440
  - TD340
  - TD350

The RT5kVA and RT6kVA 3U Rack or Tower UPS units are intended for use with the following BladeCenter and Flex System blade chassis:

- BladeCenter S
- BladeCenter E (6kVA only)
- Flex System Enterprise Chassis (6kVA only)

The RT5kVA and RT6kVA 3U Rack or Tower UPS units are intended for use with the following iDataPlex and NeXtScale dense platforms:

- iDataPlex dx360 M4
- NeXtScale n1200 Enclosure (6kVA only)

## Supported rack cabinets

The RT5kVA and RT6kVA 3U Rack or Tower UPS units can be installed in the compatible rack cabinets that are listed in Table 5.

Table 5. Rack cabinets

Part number	Description
201886X	11U Office Enablement Kit
93072RX	25U Standard Rack
93072PX	25U Static S2 Standard Rack
93634PX	42U 1100mm Dynamic Rack
93634EX	42U 1100mm Dynamic Expansion Rack
93604PX	42U 1200mm Deep Dynamic Rack
93604EX	42U 1200mm Deep Dynamic Expansion Rack
93614PX	42U 1200mm Deep Static Rack
93614EX	42U 1200mm Deep Static Expansion Rack
93084PX	42U Enterprise Rack
93084EX	42U Enterprise Expansion Rack
93074RX	42U Standard Rack
93074XX	42U Standard Rack Extension
93624PX	47U 1200mm Deep Static Rack
93624EX	47U 1200mm Deep Static Expansion Rack
93634AX	PureFlex® System 42U Rack
93634BX	PureFlex System 42U Expansion Rack
93634CX	PureFlex System 42U Rack
93634DX	PureFlex System 42U Expansion Rack

## Related publications and links

For more information about this topic, refer to these documents:

- US Announcement Letter  
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS114-100>
- Rack UPS product page  
<http://www.ibm.com/systems/x/options/rackandpower/upsrack.html>
- *Installation and User's Guide - 3U Rack or Tower UPS*  
<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5096505>
- *Network Management Card User Guide*  
<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5085199>

## Related product families

Product families related to this document are the following:

- [Uninterruptible Power Supplies](#)

## Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.  
1009 Think Place - Building One  
Morrisville, NC 27560  
U.S.A.  
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

**© Copyright Lenovo 2016. All rights reserved.**

This document, TIPS1232, was created or updated on December 9, 2015.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:  
<http://lenovopress.com/TIPS1232>
- Send your comments in an e-mail to:  
[comments@lenovopress.com](mailto:comments@lenovopress.com)

This document is available online at <http://lenovopress.com/TIPS1232>.

## Trademarks

Lenovo, the Lenovo logo, and For Those Who Do are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <http://www.lenovo.com/legal/copytrade.html>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkServer®

BladeCenter®

iDataPlex®

System x®

Flex System™

NeXtScale™

X5™

The following terms are trademarks of other companies:

Linux® is a trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft® is a trademark of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.